




# COMMERCIAL DOOR SERIES 2500

*Heavy Duty Commercial Grade Door*

*Opening sized thru 18' x 18'*


## INTERIOR ELEVATION

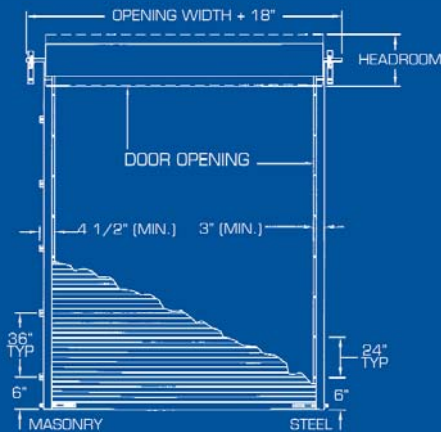


## GUIDE MOUNTING



Masonry Mount



Steel Mount



Wood Mount

## General Description

- For frequent usage such as warehouse, freight terminal, and industrial warehouse
- Utilizes 12" drums
- Limited maximum size of 18' x 18'
- Deep engagement guides for durability and better performance

## Curtain

- 26-gauge galvanized
- Grade E hard steel
- Deep ribbed corrugation
- 20 standard colors – special colors upon request with upcharge
- Siliconized polyester WeatherX paint over prime coat
- Wash coat over primer interior side
- 25-year film integrity warranty – up to 20-year chalk and fade
- Flexible wear strips
- 7" of curtain add




## Bottom Bar

- 6063-T6 aluminum extrusion
- 2" x 1 1/2" galvanized angles
- Bulb astrigal (Durometer 75)
- Stainless steel nuts and bolts



## Axle/Torque Tube

- 15/16" O.D. steel axle, 14-gauge
- Oil tempered torsion springs
- 16-gauge drums 12" diameter galvanized
- Steel ball bearings staked in drums
- Full top sheet 26-gauge galvanized



The Power of INNOVATION.

The Strength of PARTNERSHIP.



## Guides

- 12-gauge galvanized
- Polyethylene wear strip
- Bolt on head stop 1/4" plate steel
- Pre punched for lock and attachment screws




## Hardware

- 13-gauge saddle clamps
- 10-gauge slide locks 2 per door
- 16-gauge step plate 2 per door
- 1/4" steel welded angle T-bracket



## Options

- Insulation Series 2750
- Chain hoist 4:1 reduction
- Vision panels (17" x 5")
- Top draft stop
- Hood
- Steel mounting plates
- Electric operator



## DBCi Commercial Steel Curtain Roll-Up Door Solutions Include:

### 2000 (2250 Insulated)

- 14-gauge door guides
- 16-gauge galvanized steel drums w/steel ball bearings
- 26-gauge grade E steel curtain

### 2500 (2750 Insulated)

- Heavy duty 12-gauge, three-inch deep guides
- 10-gauge steel slide bolt lock
- Width up to 18 feet

### 3000 (3250 Insulated)

- Four-inch deep guides with windlock insert
- Aluminum steel angle bottom bar

### 4000 Series


- 24-gauge curtain

### 5100 Series


- Wind certified up to 16' wide

\*CONTACT A DBCi SALES REPRESENTATIVE FOR A DETAILED DRAWING.


## GUIDE DETAIL

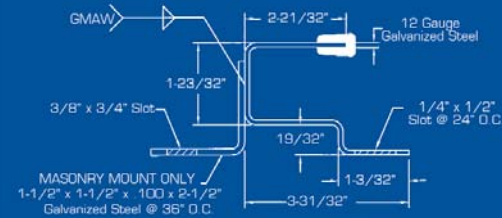

## DOOR ENGAGEMENT

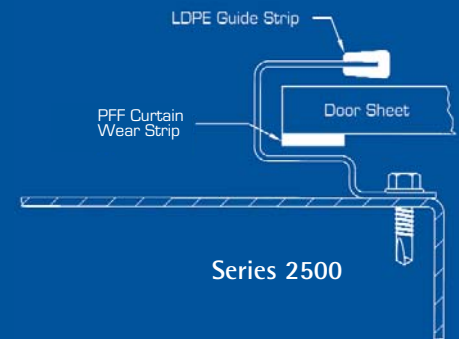

## INSULATED DOOR DETAIL

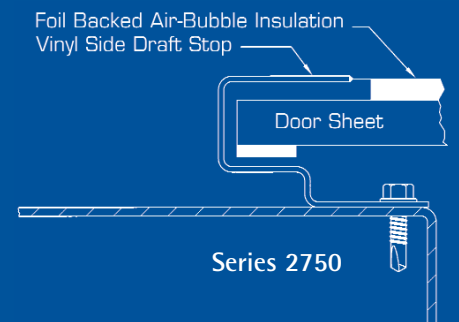

## OPENING HEIGHT HEADROOM

Thru 14' 0"	21"
Over 14' 0"	23"